

ROAD BARRIERS




EVA.5

for passages up to 5 m
with unlock device



Built in flashing light.
EVA.LAMP flashing light
circuit required



Articulated arm in line with
the new design, with
built in rubber profile and
light system



Easy to use external unlock
device



Easily accessible
control panel




- 24 Vdc electromechanical barrier for intensive use. The barrier can be easily switched over to the other side.
- Easy and fast programming of the control panel thanks to its being positioned on the top of the road barrier
- Extremely easy use and programming of the road barrier
 - Possibility of integrated FTC.S photocells thanks to the innovative hide-away system that enables them to be perfectly integrated with the look, ensuring maximum functionality
 - Possibility of battery back up system
 - Amperometric anticrushing control



LEGEND ON PAGE 11

Equipped with
foundation plate

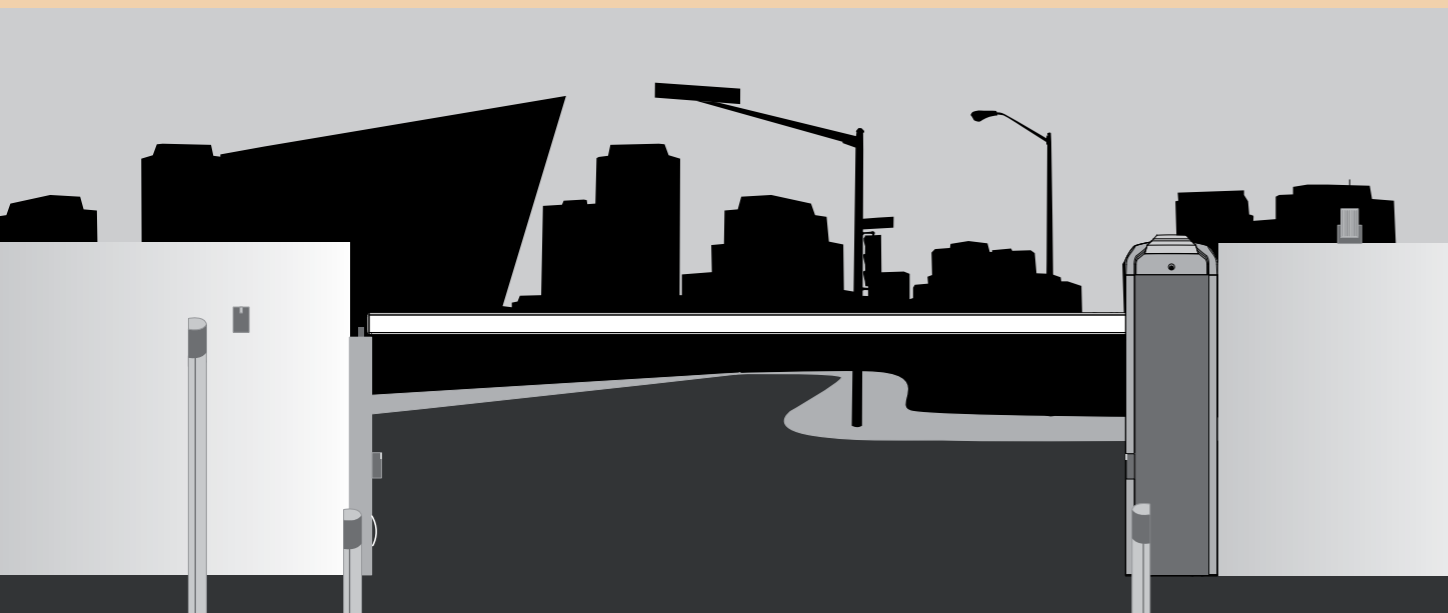


TECHNICAL DATA

EVA.5

Power supply	230 Vac
Motor supply	24 Vdc
Max. Absorbed current	1,6 A
Torque	205 Nm
Opening speed	2,5"
Operation cycle	intensive use
Protection level	IP 44
Operating Temp.	-20°C/+50°C
Weight	55 Kg
Items no. per pallet	9

EVA5.A



Elliptical arm of painted aluminium complete with cap and anti-collision rubber profile. (L: 5M) Available in two pieces with joint (EVA5.2A)

VE.TERM




Thermostat for for very cold places

VE.AM



Mobile support for bars

VE.RAST



Aluminium rack
L= 2 m. H=60cm

EVA.AF



Painted fixed support

EVA5.G



Aluminium joint for EVA5.A

EVA.L



Flashing light set for EVA5.A

EVA.SUP



Support for EVA internal accessories

**VE.KM1HN
VE.KM2HN**



Single/two-channel loop detector

VE.CS



Traffic-light control unit

VE.TL



230 Vac Traffic-light

CBY.24V




Battery charger card. The CBY.24V card allows to charge two different types of nickel metalhydrate and lead batteries.

**DA.BT6
DA.BT2**



DA.BT6: 7Ah 12 VDC Battery
DA.BT2: 2.1Ah 12 VDC Battery
DA.BT6 need must be fitted into an external box

EVA.LAMP



Circuit for EVA.5/EVA.7
Flashing light

DA.2S




Electronic module which allows the synchronized movement of two gates/barrier


EVA.CAT5



Set of 20 adhesive refractor strips for EVA5.A

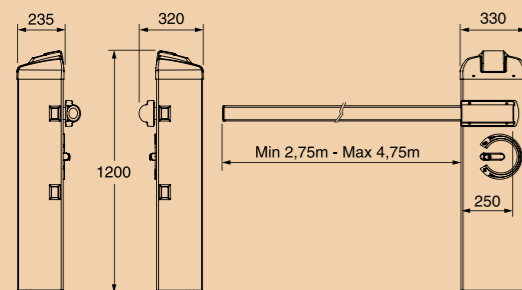

VE.PS

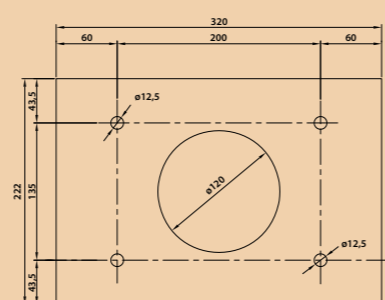

ACCESSORIES FOR USE

	BAR LENGHT (M)				
	3	3,5	4	4,5	5
EVA5.A	C	C	B	B	A
EVA5.A + VE.RAST	C	B	B	A	A
EVA5.A + VE.AM	C	C	B	B	A
EVA5.A + VE.RAST + VE.AM	C	B	B	A	A
EVA5.A + SC.RES	C	B	B	A	A
EVA5.A + SC.RES + VE.AM	C	B	B	A	A

Key: **EVA5.A**: Shank with rubber and upper profile / **VE.RAST**: Aluminium skirt / **VE.AM**: Mobile support for bar / **SC.RES**: Sensitive resistive edge (complying with annexe 4 of the Machines Directive. Attention: The installation of the VE.RAST interferes with the use of the SC.RES and vice versa. The installation of the EVA.L lights kit does not influence the balancing of the bar

